

**2019 Annual Groundwater  
Monitoring and Corrective  
Action Report**



Tennessee Valley Authority  
Paradise Fossil Plant Slag Ponds  
Area Multi-Unit CCR Unit

Prepared for:  
Tennessee Valley Authority  
1101 Market Street  
Chattanooga, TN 37402

Prepared by:  
Stantec Consulting Services Inc.  
5778 W 74th Street  
Indianapolis, IN 46278

January 31, 2020

January 31, 2020

**Reference: 2019 Annual Groundwater Monitoring and Corrective Action Report**  
TVA Paradise Fossil Plant Slag Ponds Area Multi-Unit CCR Unit

In accordance with 40 CFR § 257.90(e) of the Disposal of Coal Combustion Residuals from Electric Utilities final rule (CCR Rule), this 2019 Annual Groundwater Monitoring and Corrective Action Report (2019 Annual Report) documents 2019 groundwater monitoring activities at the Slag Ponds Area Multi-Unit CCR Unit at the Tennessee Valley Authority (TVA) Paradise Fossil Plant (PAF).

An overview of the current status of the groundwater monitoring and corrective action program for Slag Ponds Area Multi-Unit is provided below.

- At the start and end of the current 2019 annual reporting period, the Slag Ponds Area Multi-Unit was operating under an assessment monitoring program in accordance with 40 CFR § 257.95. The assessment monitoring program for the Slag Ponds Area CCR Multi-Unit was initiated on August 15, 2018.
- In the 2018 assessment monitoring sampling, statistically significant levels (SSLs) above the groundwater protection standard for arsenic were observed at monitoring well PAF-113. As a result, an assessment of corrective measures was initiated for Slag Ponds Area Multi-Unit on April 15, 2019 and was completed on July 15, 2019.
- For the 2019 assessment monitoring events, no new SSLs were identified, and the SSLs for arsenic are at the same monitoring wells identified for the 2018 assessment monitoring.
- As a final remedy has not been selected for Slag Ponds Area Multi-Unit pursuant to 40 CFR § 257.97, a Semiannual Report on the Progress of Remedy Selection was prepared and placed in the operating record on January 15, 2020 in accordance with 40 CFR § 257.97(a) and § 257.105(h)(12) to document the progress made toward selection and design of the remedy.
- Since a remedy has not been selected pursuant to 40 CFR § 257.97, remedial activities have not been initiated for the Slag Ponds Area Multi-Unit pursuant to 40 CFR § 257.98 during the current 2019 annual reporting period discussed herein.

In 2017, TVA established a groundwater monitoring network and program at the PAF Slag Ponds Area Multi-Unit CCR Unit in accordance with 40 CFR § 257.90. The groundwater monitoring network was certified by a qualified Professional Engineer as required by 40 CFR § 257.91(f). During 2019, TVA performed the following groundwater monitoring activities:

- Completed the statistical evaluation of the 2018 assessment monitoring data for Appendix IV constituents in accordance with 40 CFR § 257.95(g) in January 2019 and determined that there were statistically significant levels over the groundwater protection standard for arsenic at monitoring well PAF-113.

## 2019 ANNUAL GROUNDWATER MONITORING AND CORRECTIVE ACTION REPORT

TVA Paradise Fossil Plant Slag Ponds Area Multi-Unit CCR Unit

January 31, 2020

- Placed notification of the exceedances of the groundwater protection standard for arsenic at monitoring well PAF-113 in the facility operating record in accordance with 40 CFR § 257.95(g) and § 257.105(h)(8); provided notification to the State of Kentucky in accordance with 40 CFR §257.106(h)(6); and placed notification on the CCR Rule Compliance Data and Information website (<https://www.tva.gov/Environment/Environmental-Stewardship/Coal-Combustion-Residuals>) in accordance with 40 CFR § 257.107(h)(6).
- As there has been no indication of offsite migration of arsenic-impacted groundwater onto adjacent parcels of land, there is no current obligation to notify persons who own or reside on adjacent land pursuant to 40 CFR § 257.95(g)(2).
- An Appendix IV alternate source demonstration was performed under 40 CFR § 257.95(g)(3)(ii) but was not completed within the 90-day period of time specified under 40 CFR § 257.95(g)(4).
- Initiated Assessment of Corrective Measures in accordance with 40 CFR § 257.95(g)(3)(i) and 40 CFR § 257.96.
- Completed the Assessment of Corrective Measures in accordance with 40 CFR § 257.96(d), which was placed on the CCR Rule Compliance Data and Information website (<https://www.tva.gov/Environment/Environmental-Stewardship/Coal-Combustion-Residuals>) in accordance with 40 CFR § 257.107(h)(8).
- Sampled and analyzed wells in the certified monitoring network for CCR constituents (Appendix III and Appendix IV constituents) for the 2019 semiannual assessment monitoring events in accordance with 40 CFR § 257.95(d)(1). The sampling results were placed in the operating record as required by 40 CFR § 257.95(d)(1) and 257.105(h)(6). Additionally, these results are included in Table 1 of this 2019 Annual Report in accordance with 40 CFR § 257.95(d)(3).
- Placed notification of exceedances of groundwater protection standards in the facility operating record in accordance with 40 CFR § 257.95(g) and 257.105(h)(8); provided notification to the State of Kentucky in accordance with 40 CFR § 257.106(h)(6); and placed the notification on the CCR Rule Compliance Data and Information website (<https://www.tva.gov/Environment/Environmental-Stewardship/Coal-Combustion-Residuals>) in accordance with 40 CFR § 257.107(h)(6)<sup>1</sup>.
- Continued TVA's third-party Quality Assurance Program to evaluate and improve groundwater analytical data using best practices concerning field methods and validation techniques, as well as the application of the most appropriate statistical methods.
- Reviewed new data as it became available to maintain compliance with 40 CFR § 257.90 through 257.98.
- Complied with recordkeeping requirements as specified in 40 CFR § 257.105(h), notification requirements specified in 40 CFR § 257.106(h) and internet requirements specified in 40 CFR § 257.107(h).

No problems were encountered during the third year of the Groundwater Quality Monitoring Program; therefore, no further action has been recommended, except for the planned key activities for 2020 that are outlined below.

---

<sup>1</sup> Table 6 in this 2019 Annual Groundwater Monitoring and Corrective Action Report meets this notification requirement for the second semiannual assessment monitoring sampling event conducted in 2019.

## 2019 ANNUAL GROUNDWATER MONITORING AND CORRECTIVE ACTION REPORT

TVA Paradise Fossil Plant Slag Ponds Area Multi-Unit CCR Unit

January 31, 2020

The projected key activities for 2020 are:

- Continue semiannual assessment monitoring at the certified groundwater monitoring network consistent with 40 CFR § 257.95 and place the sampling results in the operating record as required by 40 CFR § 257.95(d)(1) and 257.105(h)(6).
- Evaluate whether one or more Appendix IV constituents are detected at SSLs above the established groundwater protection standards in accordance with 40 CFR § 257.95(g).
- Continue to refine the characterization of the nature and extent of the release.
- Perform further site characterization to improve the PAF Conceptual Site Model (CSM).
- Prepare and place in the operating record a Semiannual Report on the Progress of Remedy Selection on July 15, 2020 in accordance with 40 CFR § 257.97(a) to document the progress made toward selection and design of the remedy.
- Place notification of exceedances of groundwater protection standards in the facility operating record in accordance with 40 CFR § 257.95(g) and 257.105(h)(8); provide notification to the State of Kentucky in accordance with 40 CFR § 257.106(h)(6); and place notification on the CCR Rule Compliance Data and Information website (<https://www.tva.gov/Environment/Environmental-Stewardship/Coal-Combustion-Residuals>) in accordance with 40 CFR § 257.107(h)(6).
- Continue TVA's third-party Quality Assurance Program to evaluate groundwater analytical data using best practices concerning field methods and validation techniques, as well as the application of the most appropriate statistical methods.
- Review new data as it becomes available and implement changes to the groundwater monitoring program as necessary to maintain compliance with 40 CFR § 257.90 through 257.98.
- Comply with recordkeeping requirements as specified in 40 CFR § 257.105(h), notification requirements specified in 40 CFR § 257.106(h) and internet requirements specified in 40 CFR § 257.107(h).

### GROUNDWATER MONITORING WELL NETWORK

Slag Ponds 2A and 2B and Slag Stilling Pond 2C are located in the northeast corner of PAF. Slag Ponds 2A and 2B and Slag Stilling Pond 2C serve as an ash pond management facility for the storage and settling of boiler slag. Influent to this impoundment consists of sluiced boiler slag, which flows into the southeastern portion of Slag Pond 2A via a series of ash inlets. Slag Ponds 2A and 2B also receive process water. Water flows from Slag Pond 2A to Slag Pond 2B to Slag Stilling Pond 2C, and Slag Stilling Pond 2C discharge to the Green River. Receipt of boiler slag and flows to the Slag Ponds 2A and 2B and Slag Stilling Pond 2C will cease in accordance with the CCR rule requirements.

The monitoring well network for the PAF Slag Ponds Area Multi-Unit CCR Unit consists of one background well (95-48A) two upgradient wells (PAF-108 and PAF-109) and four downgradient wells (95-47C, PAF-110, PAF-112, and PAF-113). The downgradient wells are installed at the waste boundary. Figure 1 is an aerial photograph that shows Slag Ponds Area and the groundwater monitoring well locations. The monitoring well network was designed for a Multi-Unit CCR Unit (Slag Ponds 2A and 2B and Slag Stilling Pond 2C).

## 2019 ANNUAL GROUNDWATER MONITORING AND CORRECTIVE ACTION REPORT

TVA Paradise Fossil Plant Slag Ponds Area Multi-Unit CCR Unit

January 31, 2020

No monitoring wells in the CCR network were installed or decommissioned during the 2019 reporting period. The certification of the groundwater monitoring system required under 40 CFR § 257.91(f) is included in the facility operating record and on the CCR Compliance Data and Information website (<https://www.tva.gov/Environment/Environmental-Stewardship/Coal-Combustion-Residuals>).

### GROUNDWATER SAMPLING AND LABORATORY ANALYTICAL TESTING

A groundwater sampling and analysis program was developed in 2016-2017 and includes, as required by 40 CFR § 257.93(a), procedures and techniques for: sample collection; sample preservation and shipment; analytical procedures; chain-of-custody control; and, quality assurance and quality control (QA/QC) required by 40 CFR § 257.93(a). The groundwater monitoring program includes sampling and analysis procedures designed to provide monitoring results that are an accurate representation of groundwater quality at background and downgradient wells.

The 2019 assessment monitoring groundwater sampling was conducted between January and October 2019 and the results are summarized in Table 1. Two semiannual assessment monitoring groundwater sampling events were each followed by retesting groundwater sampling events. A summary of groundwater sample locations, well designations, analytes sampled, sampling dates and monitoring program status is provided in Table 2.

Groundwater elevations were measured in each monitoring well immediately prior to purging during each sampling event as required by 40 CFR § 257.93(c). Groundwater elevations and Green River surface water elevations are summarized in Table 3. Groundwater flow directions were determined for each sampling event, and a generalized depiction of groundwater flow direction is illustrated on Figure 2. In general, groundwater flow at PAF is influenced by Green River to the northeast. The primary groundwater flow direction from the Slag Ponds Area Multi-Unit CCR Unit is to the northeast toward the Green River.

Hydraulic conductivity values at the background, upgradient, or downgradient groundwater monitoring wells, as summarized in Table 4, are documented by a 2018 hydrogeologic evaluation (Terracon, 2018). Testing data indicates the uppermost saturated zone has a geometric mean hydraulic conductivity of  $8.96 \times 10^{-5}$  centimeters per second (cm/sec). Linear groundwater flow velocity was calculated for the uppermost aquifer using:

- the geometric mean hydraulic conductivity calculated from hydraulic testing ( $8.96 \times 10^{-5}$  cm/sec);
- horizontal hydraulic gradients measured during the implementation of the groundwater sampling and analysis program, ranging from 0.0137 to 0.0255 feet per foot (ft/ft); and,
- an effective porosity of 30% (TVA, 1998).

The average linear flow velocity in the uppermost aquifer ranges from approximately 4 to 8 feet per year. The rate and direction of groundwater flow for each groundwater sampling event is summarized in Table 5 in accordance with 40 CFR § 257.93(c).

### STATISTICAL ANALYSIS OF GROUNDWATER DATA

The groundwater monitoring data for the 2019 assessment monitoring events were evaluated using statistical procedures as required by 40 CFR § 257.93(f) through 257.93(h). The statistical method certification is included in the facility operating record and the CCR Compliance Data and Information website. Groundwater protection standards were established in accordance with 40 CFR § 257.95(h), as the larger of published regulatory limits or screening criteria (e.g., maximum contaminant levels [MCLs])

## 2019 ANNUAL GROUNDWATER MONITORING AND CORRECTIVE ACTION REPORT

TVA Paradise Fossil Plant Slag Ponds Area Multi-Unit CCR Unit

January 31, 2020

and upper tolerance limits (UTLs) derived from background. Maximum contaminant levels may or may not be considered the appropriate groundwater protection standard depending on background well concentrations for each Appendix IV<sup>2</sup> constituent<sup>3</sup>. The 2019 Statistical Analysis Report is included in Appendix A and covers the three CCR Units at PAF.

The sampling results used to identify potential groundwater protection standards exceedances were obtained during four monitoring events that were performed between January and October of 2019<sup>4</sup>. Comparisons were made against a fixed groundwater protection standard via a confidence interval band. Retesting was conducted after each semiannual sampling event and none of the individual compliance point measurements were directly compared against the groundwater protection standard. The Appendix IV monitoring data collected in Year-One (2017), Year-Two (2018), and Year-Three (2019)<sup>5</sup> were used to construct the confidence interval bands. Cross-sections of each confidence interval band were then compared to the groundwater protection standard for the most recent assessment monitoring event in each case for the purpose of identifying any SSLs. A well-constituent pair is considered out of compliance only if its average constituent levels, as estimated via the confidence interval cross-section, currently exceed the groundwater protection standard. During 2019 Assessment Monitoring, an arsenic-related SSL was recorded at monitoring well PAF-113 (as in 2018 Assessment Monitoring) and is summarized in Table 6. This is the same SSL at the same well as was previously identified.

### NARRATIVE DISCUSSION OF ANY TRANSITION BETWEEN MONITORING PROGRAMS

An Assessment Monitoring Program was established on August 15, 2018 and implemented as specified in 40 CFR § 257.95. Notification of the assessment monitoring program was provided to the State of Kentucky and placed on the CCR Rule Compliance Data and Information website(<https://www.tva.gov/Environment/Environmental-Stewardship/Coal-Combustion-Residuals>) on September 14, 2018 in accordance with 40 CFR § 257.106(h)(4) and 40 CFR § 257.107(h)(4), respectively.

---

<sup>2</sup> Appendix IV CCR Constituents: antimony, arsenic, barium, beryllium, cadmium, chromium, cobalt, fluoride, lead, lithium, mercury, molybdenum, selenium, thallium, radium 226 and radium 228 combined

<sup>3</sup> USEPA has published MCLs or alternate regulatory limits for each of the Appendix IV constituents. Consequently, in most cases the groundwater protection standard is equal to the MCL. However, there may be cases where background levels of a constituent exceed the MCL. In these instances, an alternate groundwater protection standard must be derived from on-site background levels. On July 30, 2018, EPA provided alternate regulatory limits (i.e., that could be used as potential groundwater protection standards) for four of the Appendix IV chemical Constituents of Interest (COIs) for which the agency has not assigned MCLs to date. If site-specific background levels are lower, then these may be used in place of background levels under CFR § 257.95(h)(2). Specifically, those alternate COIs include threshold values at the following levels: 1.) Cobalt - 6 µg/L; 2.) Lithium - 40 µg/L; 3.) Molybdenum - 100 µg/L; and, 4.) Lead - 15 µg/L.

<sup>4</sup> The CCR rule requires a minimum of two semiannual sampling events per well once the required background data has been obtained. In 2019, two semiannual assessment monitoring groundwater sampling events were each followed by retesting groundwater sampling events.

<sup>5</sup> The September/October 2019 retest groundwater sampling event that followed the second semiannual sampling event was not included in the statistical evaluation. This information will be included in the statistical evaluation of 2020 assessment monitoring sampling events.

# 2019 ANNUAL GROUNDWATER MONITORING AND CORRECTIVE ACTION REPORT

TVA Paradise Fossil Plant Slag Ponds Area Multi-Unit CCR Unit

January 31, 2020

In accordance with assessment monitoring program requirements, subsequent sampling and analysis of all wells in the certified monitoring network for Appendix III and IV constituents occurred in accordance with 40 CFR § 257.95(d)(1). Appendix III and IV constituent concentrations from 2019 assessment monitoring are summarized in Table 1. Groundwater protection standards were established in accordance with 40 CFR § 257.95(d)(2) and are summarized along with Appendix IV SSLs in Table 6. During 2019 Assessment Monitoring, one arsenic-related SSL above the groundwater protection standard was recorded at monitoring well PAF-113. TVA will continue to review new data as it becomes available and implement changes to the groundwater monitoring program as necessary to maintain compliance with 40 CFR § 257.90 through 257.98.

## LIMITATIONS

This document entitled 2019 Annual Groundwater Monitoring and Corrective Action Report was prepared by Stantec Consulting Services Inc. ("Stantec") for the Tennessee Valley Authority (the "Client"). The material in it reflects Stantec's professional judgment in light of the scope, schedule and other limitations stated in the document. The opinions in the document are based on conditions and information existing at the time the document was published and do not take into account any subsequent changes. In preparing the document, Stantec relied upon data and information supplied to it by the client.

Prepared by Benjamin D. Schutt  
(signature)

**Benjamin D. Schutt**  
Environmental Engineer



Reviewed by \_\_\_\_\_  
(signature)

**Robert K. Reynolds**  
Senior Geologist



Reviewed by \_\_\_\_\_  
(signature)

**Matthew J. Dagon**  
Senior Geologist

# **2019 ANNUAL GROUNDWATER MONITORING AND CORRECTIVE ACTION REPORT**

TVA Paradise Fossil Plant Slag Ponds Area Multi-Unit CCR Unit

January 31, 2020

## **References:**

TVA, 1998. Paradise Fossil Plant Groundwater Assessment WR98-1-64-124. October 1998.

Terracon, 2018. Aquifer Testing and Equipment Blank Results. TVA CCR Rule – Paradise Fossil Plant (PAF). Terracon Consultants, Inc. December 12, 2018.

## **Attachments:**

Figure 1 – Map with CCR Unit Background and Downgradient Wells

Figure 2 – Generalized Groundwater Flow Direction Map

Table 1 – Assessment Monitoring Groundwater Sampling Results

Table 2 – Groundwater Sampling Summary

Table 3 – Groundwater and Surface Water Elevation Summary


Table 4 – Hydraulic Conductivity Data Summary

Table 5 – Rate and Direction of Groundwater Flow Summary


Table 6 – Statistically Significant Levels (SSLs) Above GWPSs

Appendix A – 2019 Statistical Analysis Report

## **FIGURES**

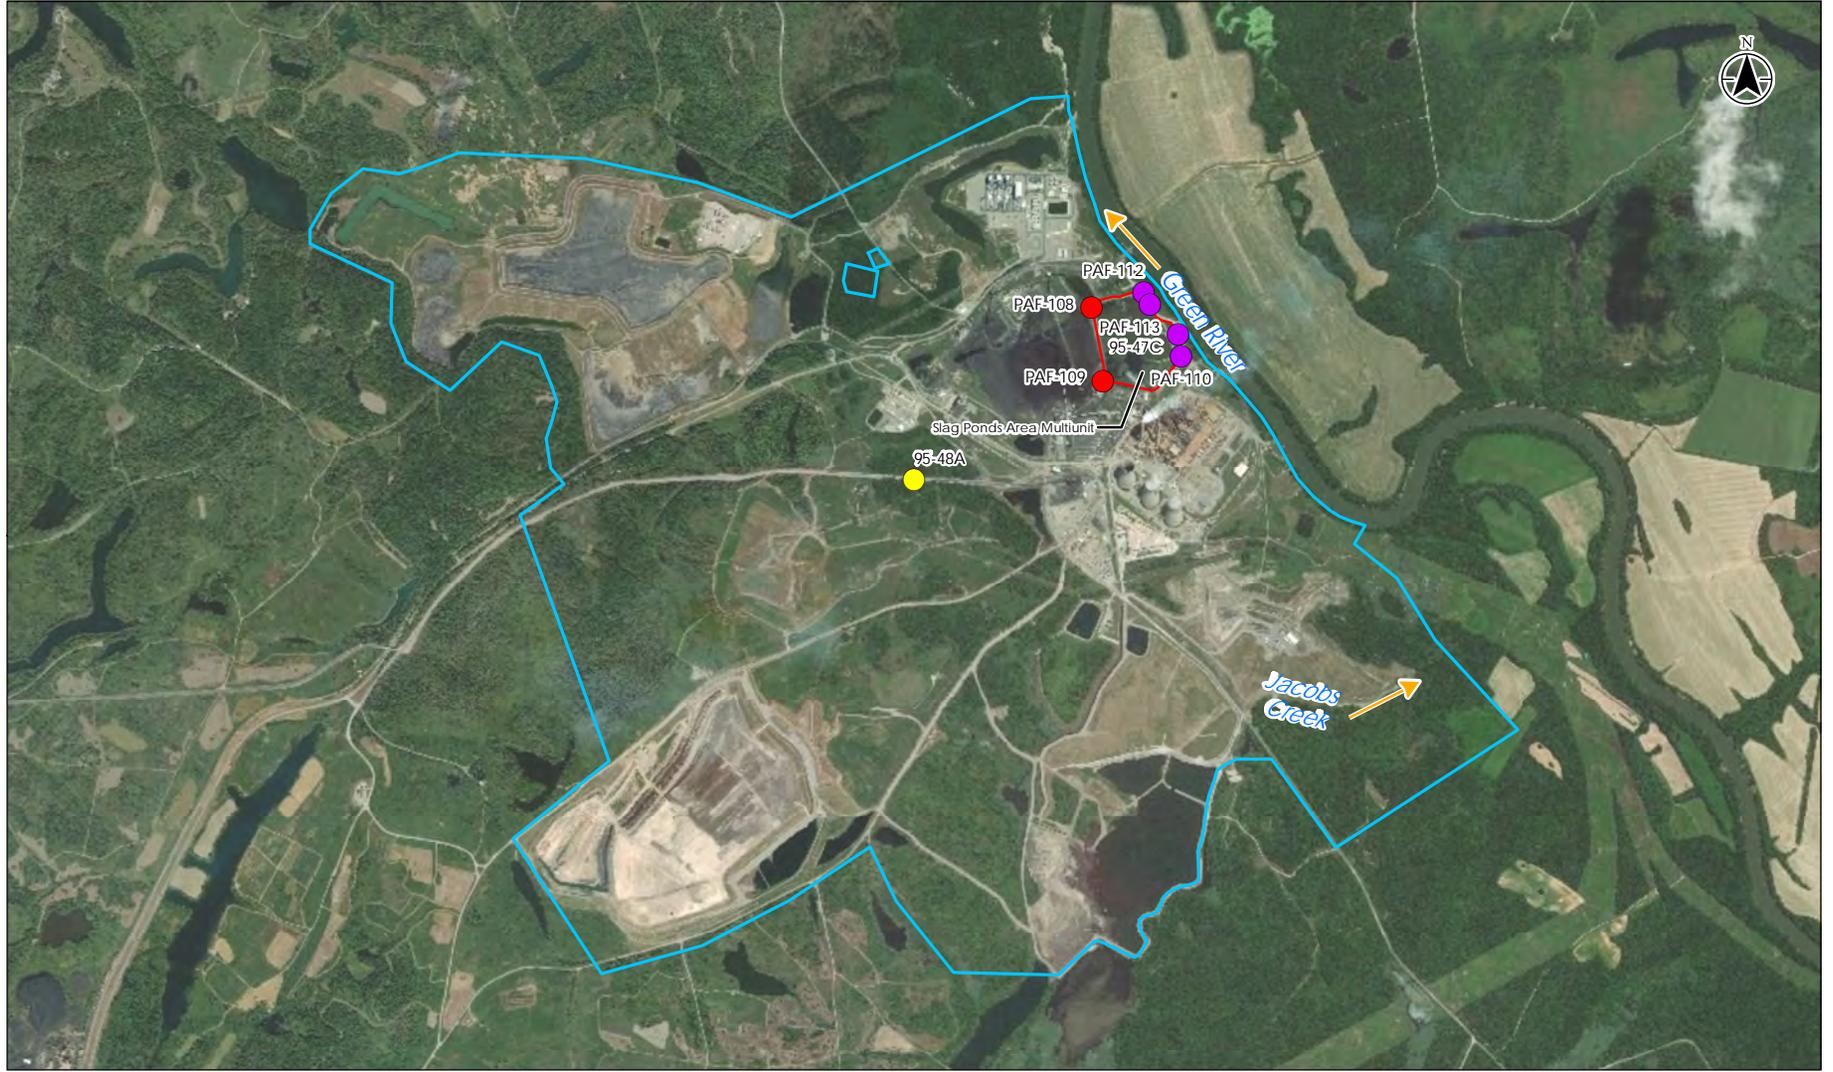

- Background Well
- Downgradient Well
- Upgradient Well
- CCR Unit Subject to CCR Rule
- TVA Property Boundary



Notes  
 1. Coordinate System: NAD 1983 StatePlane Kentucky South FIPS 1402 Feet  
 2. Basemap Source: Esri, DigitalGlobe, GeoEye, EarthStar Geographics, CNES/Airbus DS, USDA, USGS, AeroGRID, IGN, and the GIS User Community

Project Location 182603529  
 Drakesboro Prepared by LMB on 2020-01-03  
 Muhlenberg County, Technical Review by MD on 2020-01-03  
 Kentucky Independent Review by IR on 2020-01-03


Client/Project  
 Tennessee Valley Authority  
 Paradise Fossil Plant  
 CCR Rule

Figure No.  
 1


Title  
 Map with CCR Unit Background  
 and Downgradient Wells



Disclaimer: Stantec assumes no responsibility for data supplied in electronic format. The recipient accepts full responsibility for verifying the accuracy and completeness of the data. The recipient releases Stantec, its officers, employees, consultants and agents, from any and all claims arising in any way from the content or provision of the data.

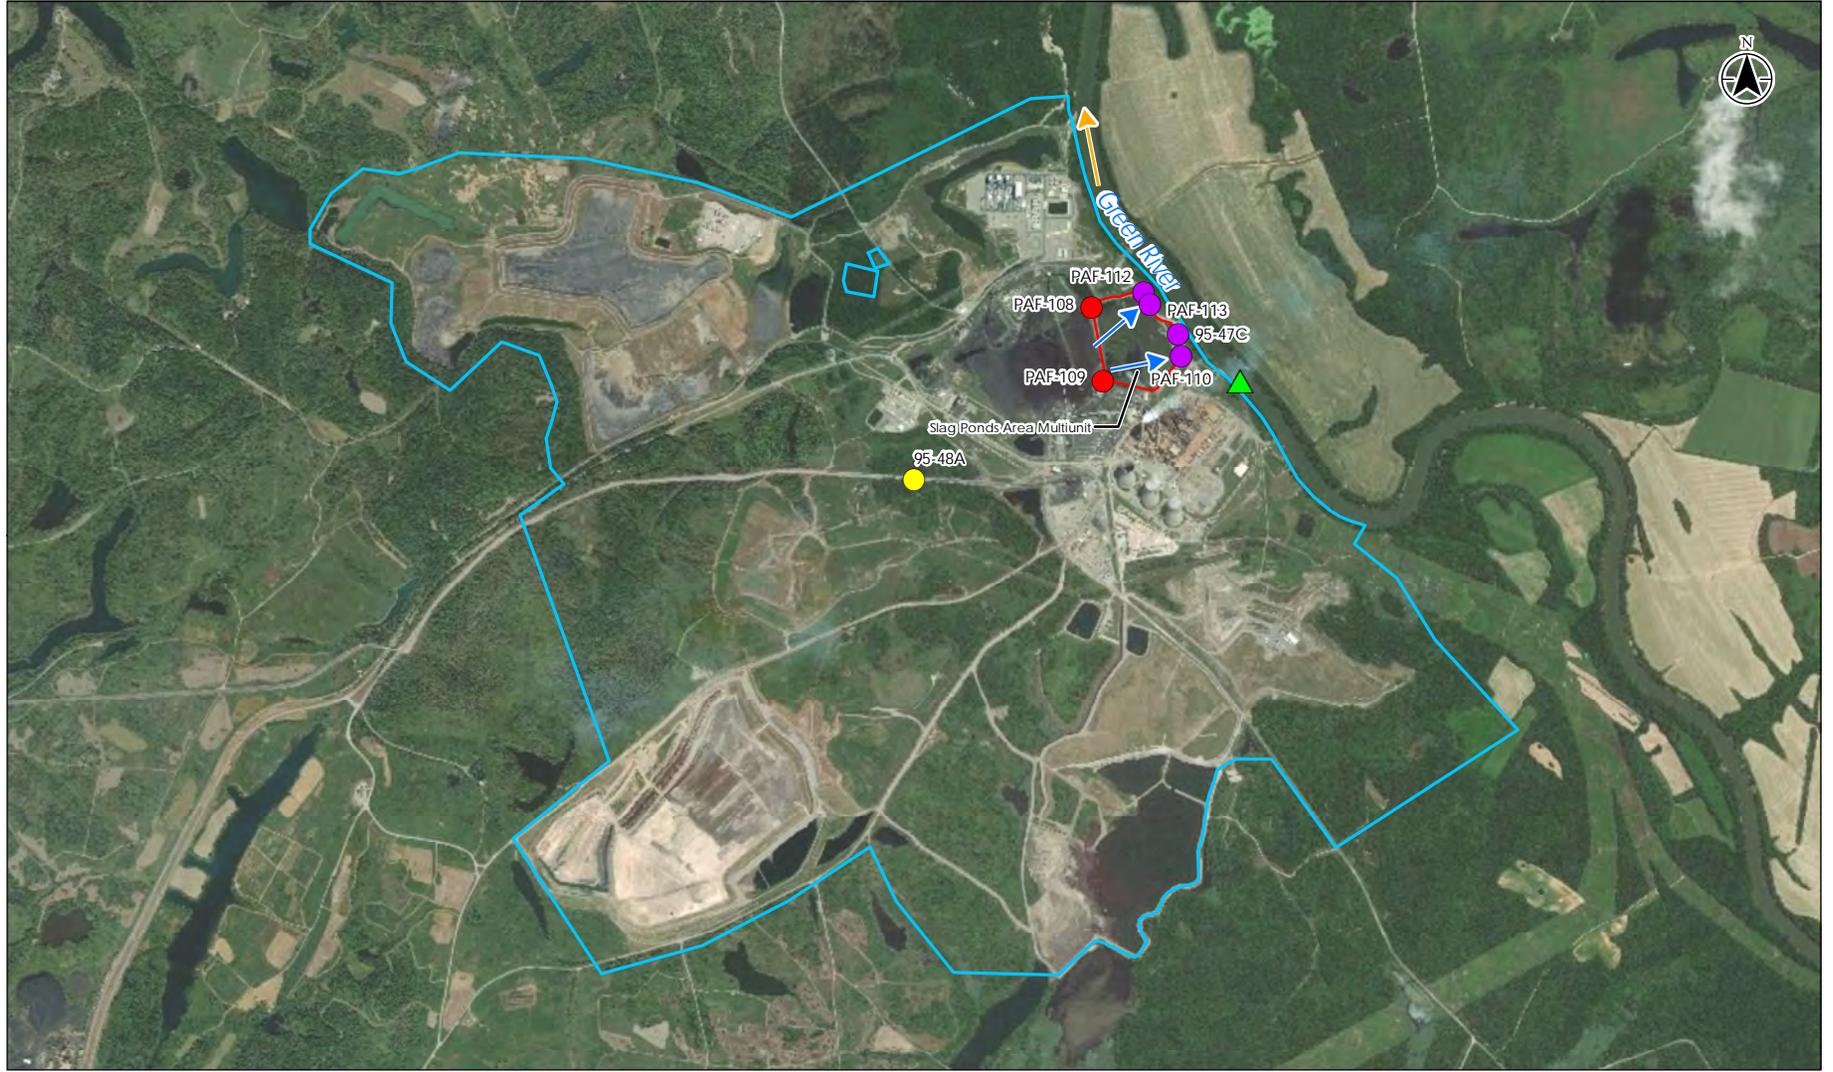

- ▲ Staff Gauge
- Background Well
- Downgradient Well
- Upgradient Well
- Groundwater Flow Direction
- CCR Unit Subject to CCR Rule
- TVA Property Boundary



Notes  
 1. Coordinate System: NAD 1983 StatePlane Kentucky South FIPS 1602 Feet  
 2. Basemap Source: Esri, DigitalGlobe, GeoEye, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AeroGRID, IGN, and the GIS User Community



Project Location: Drakesboro, Muhlenberg County, Kentucky  
 Prepared by LMB on 2020-01-03  
 Technical Review by MD on 2020-01-03  
 Independent Review by IR on 2020-01-03

Client/Project: Tennessee Valley Authority  
 Paradise Fossil Plant  
 CCR Rule

Figure No.: 2

Title: Generalized Groundwater Flow Direction Map

Groundwater flow directions are based on Green River elevation and groundwater elevations from CCR monitoring wells.

Disclaimer: Stantec assumes no responsibility for data supplied in electronic format. The recipient accepts full responsibility for verifying the accuracy and completeness of the data. The recipient releases Stantec, its officers, employees, consultants and agents, from any and all claims arising in any way from the content or provision of the data.

U:\182603529\182603529\182603529\_GeneralizedGroundwaterFlowDirectionMap.mxd Revised: 2020-01-03 by: LBlackman

## **TABLES**

**Table 1  
Assessment Monitoring  
Groundwater Sampling  
Results**

Monitoring Well		95-47C							
Sample Date		08-Jan-19		06-Mar-19		23-Jul-19		01-Oct-19	
Sample Round		1		1 - Retest		2		2 - Retest	
Well Designation		Downgradient		Downgradient		Downgradient		Downgradient	
Analyte	Units	Result	Q	Result	Q	Result	Q	Result	Q
<b>Total Metals</b>									
Antimony	ug/L	< 1.12	U	< 0.378	U	< 0.378	U	< 0.378	U
Arsenic	ug/L	< 0.764	U*	0.433	J	< 0.323	U	0.587	J
Barium	ug/L	21.9		< 27.9	U*	< 19.8	U*	20.5	
Beryllium	ug/L	0.199	J	0.167	J	0.219	J	< 1.05	U*
Boron	ug/L	1030		869		1270		986	
Cadmium	ug/L	< 0.125	U						
Calcium	ug/L	118000		96500		120000		115000	
Chromium	ug/L	< 1.93	U*	< 1.53	U	< 1.53	U	< 1.53	U
Cobalt	ug/L	36.4		32		32.2		38.5	
Lead	ug/L	< 0.094	U	< 0.128	U	< 0.128	U	< 0.128	U
Lithium	ug/L	134		120	J	155		151	
Mercury	ug/L	< 0.0653	U	< 0.101	U	< 0.101	U	< 0.101	U
Molybdenum	ug/L	< 0.474	U	< 0.61	U	< 0.61	U	< 0.61	U
Selenium	ug/L	< 0.813	U	< 2.62	U	< 1.51	U	< 1.51	U
Thallium	ug/L	< 0.063	U	< 0.128	U	< 0.148	U	< 0.148	U
Radium 226 + Radium 228	pCi/L	1.40		2.06	J	1.86	J	1.57	J
<b>Anions</b>									
Chloride	mg/L	14.9		14		12.8		14.5	
Fluoride	mg/L	0.278		0.258		0.298		0.184	
Sulfate	mg/L	438		374		370		420	
<b>General Chemistry</b>									
Total Dissolved Solids	mg/L	810		773		796		774	
<b>Field Parameters</b>									
Temperature, Water (C)	DEG_C	18.2		17.1		18.7		18.5	
Turbidity, field	NTU	2.52		1.91		2.44		1.68	
ORP	mV	84.3		-1.9		-11		-3.9	
Specific Cond. (Field)	mS/cm	1.04		1.1		0.93		1.05	
Dissolved Oxygen	mg/L	0.27		0.36		0.27		0.28	
pH (field)	SU	6.26		6.43		6.25		6.32	

Notes:

Q - Data Qualifier

U\* - Result should be considered "not-detected" because it was detected in a rinsate blank or laboratory blank at similar level

J - Quantitation is approximate due to limitations identified during data validation

UJ - Analyte not detected, but the reporting limit may or may not be higher due to a bias identified during data validation

U - Analyte not detected

ug/L - micrograms per liter

mg/L - milligrams per liter

pCi/L - picoCurie per liter

DEG\_C - degrees Celsius

NTU - Nephelometric Turbidity Units

mV - millivolts

mS/cm - milliseimens per centimeter

SU - Standard Unit

**Table 1  
Assessment Monitoring  
Groundwater Sampling  
Results**

Monitoring Well		95-48A							
Sample Date		08-Jan-19		04-Mar-19		23-Jul-19		01-Oct-19	
Sample Round		1		1 - Retest		2		2 - Retest	
Well Designation		Background		Background		Background		Background	
Analyte	Units	Result	Q	Result	Q	Result	Q	Result	Q
<b>Total Metals</b>									
Antimony	ug/L	< 1.12	U	< 0.378	U	< 0.378	U	< 0.378	U
Arsenic	ug/L	6.6		5.19		5.72		5.61	
Barium	ug/L	5.65	J	< 5.75	U*	< 5.84	U*	5.44	J
Beryllium	ug/L	0.891	J	1.03		0.928	J	< 1.73	U*
Boron	ug/L	285		291		304		307	
Cadmium	ug/L	< 0.125	U	< 0.125	U	< 0.125	U	< 0.125	U
Calcium	ug/L	469000		435000		384000		425000	
Chromium	ug/L	< 0.631	U	< 1.53	U	< 1.53	U	< 1.53	U
Cobalt	ug/L	82.1		99.5		84.1		71.6	
Lead	ug/L	< 0.094	U	< 0.294	U*	< 0.128	U	< 0.128	U
Lithium	ug/L	166		146		150		167	
Mercury	ug/L	< 0.0653	U	< 0.101	U	< 0.101	U	< 0.101	U
Molybdenum	ug/L	0.982	J	< 0.61	U	< 0.61	U	< 0.61	U
Selenium	ug/L	< 0.813	U	< 2.62	U	< 1.51	U	< 1.51	U
Thallium	ug/L	0.192	J	< 0.128	U	< 0.148	U	< 0.148	U
Radium 226 + Radium 228	pCi/L	1.99	J	1.50	J	1.72		2.79	
<b>Anions</b>									
Chloride	mg/L	36.5		33.4		35.7		36.5	
Fluoride	mg/L	0.513		0.526		0.368		0.292	
Sulfate	mg/L	2960		3000		2920		2960	
<b>General Chemistry</b>									
Total Dissolved Solids	mg/L	4580		4120		4130		4100	
<b>Field Parameters</b>									
Temperature, Water (C)	DEG_C	14.3		8.6		16		17.6	
Turbidity, field	NTU	5.53		12.5		3.48		2.39	
ORP	mV	1.5		66.8		-27.6		-313.1	
Specific Cond. (Field)	mS/cm	4.55		4.06		4.48		3.64	
Dissolved Oxygen	mg/L	0.35		0.36		0.19		0.19	
pH (field)	SU	6.7		6.01		6.03		5.94	

Notes:

Q - Data Qualifier

U\* - Result should be considered "not-detected" because it was detected in a rinsate blank or laboratory blank at similar level

J - Quantitation is approximate due to limitations identified during data validation

UJ - Analyte not detected, but the reporting limit may or may not be higher due to a bias identified during data validation

U - Analyte not detected

ug/L - micrograms per liter

mg/L - milligrams per liter

pCi/L - picoCurie per liter

DEG\_C - degrees Celsius

NTU - Nephelometric Turbidity Units

mV - millivolts

mS/cm - milliseimens per centimeter

SU - Standard Unit

**Table 1  
Assessment Monitoring  
Groundwater Sampling  
Results**

**CCR Annual Groundwater Monitoring and  
Corrective Action Report - TVA Paradise  
Fossil Plant**

Monitoring Well		PAF-108							
Sample Date		09-Jan-19		05-Mar-19		24-Jul-19		02-Oct-19	
Sample Round		1		1 - Retest		2		2 - Retest	
Well Designation		Upgradient		Upgradient		Upgradient		Upgradient	
Analyte	Units	Result	Q	Result	Q	Result	Q	Result	Q
<b>Total Metals</b>									
Antimony	ug/L	< 1.12	U	< 0.378	U	< 0.378	U	< 0.378	U
Arsenic	ug/L	< 0.969	U*	0.856	J	< 1.25	U*	1.4	
Barium	ug/L	44.7		< 45.6	U*	53.4		61.1	
Beryllium	ug/L	< 0.057	U	< 0.155	U	< 0.182	U	< 0.39	U*
Boron	ug/L	180		< 217	U*	272		345	
Cadmium	ug/L	< 0.125	U						
Calcium	ug/L	131000		123000		164000		180000	
Chromium	ug/L	< 2.34	U*	< 1.53	U	< 1.53	U	< 1.53	U
Cobalt	ug/L	7.23		5.98		4.58		15.4	
Lead	ug/L	< 0.094	U	< 0.128	U	< 0.128	U	< 0.128	U
Lithium	ug/L	42.6		38.3		43.9		62.9	
Mercury	ug/L	< 0.0653	U	< 0.101	U	< 0.101	U	< 0.101	U
Molybdenum	ug/L	1.63	J	1.37	J	< 2.5	U*	1.58	J
Selenium	ug/L	< 0.813	U	< 2.62	U	< 1.51	U	< 1.51	U
Thallium	ug/L	< 0.063	U	< 0.128	U	< 0.148	U	< 0.148	U
Radium 226 + Radium 228	pCi/L	0.907		1.17	J	1.51	J	1.66	
<b>Anions</b>									
Chloride	mg/L	12.4		14.9		15.1		19.4	
Fluoride	mg/L	0.236		0.174		0.137		< 0.0853	U*
Sulfate	mg/L	182		310		431		614	J
<b>General Chemistry</b>									
Total Dissolved Solids	mg/L	567		400		957		1150	
<b>Field Parameters</b>									
Temperature, Water (C)	DEG_C	15.8		13.9		20.1		21.6	
Turbidity, field	NTU	0.96		1		1.33		1.1	
ORP	mV	-10.8		-35.4		-51.1		-63.6	
Specific Cond. (Field)	mS/cm	1		1.12		1.17		1.47	
Dissolved Oxygen	mg/L	0.56		0.72		0.6		0.5	
pH (field)	SU	6.72		6.7		6.64		6.64	

Notes:

Q - Data Qualifier

U\* - Result should be considered "not-detected" because it was detected in a rinsate blank or laboratory blank at similar level

J - Quantitation is approximate due to limitations identified during data validation

UJ - Analyte not detected, but the reporting limit may or may not be higher due to a bias identified during data validation

U - Analyte not detected

ug/L - micrograms per liter

mg/L - milligrams per liter

pCi/L - picoCurie per liter

DEG\_C - degrees Celsius

NTU - Nephelometric Turbidity Units

mV - millivolts

mS/cm - milliseimens per centimeter

SU - Standard Unit

**Table 1  
Assessment Monitoring  
Groundwater Sampling  
Results**

**CCR Annual Groundwater Monitoring and  
Corrective Action Report - TVA Paradise  
Fossil Plant**

Monitoring Well		PAF-109							
Sample Date		09-Jan-19		05-Mar-19		24-Jul-19		02-Oct-19	
Sample Round		1		1 - Retest		2		2 - Retest	
Well Designation		Upgradient		Upgradient		Upgradient		Upgradient	
Analyte	Units	Result	Q	Result	Q	Result	Q	Result	Q
<b>Total Metals</b>									
Antimony	ug/L	< 1.12	U	< 0.378	U	< 0.378	U	< 0.378	U
Arsenic	ug/L	< 1.77	U*	1.24		1.17		1.03	
Barium	ug/L	40		< 38.1	U*	34.3		35	
Beryllium	ug/L	< 0.057	UJ	< 0.155	U	0.29	J	< 0.643	U*
Boron	ug/L	51.5	J	< 108	U*	87.3		58.2	J
Cadmium	ug/L	< 0.125	U	< 0.125	U	< 0.125	U	< 0.125	U
Calcium	ug/L	102000		98900		95800		97600	
Chromium	ug/L	< 1.96	U*	< 1.53	U	< 1.53	U	< 1.53	U
Cobalt	ug/L	1.03		0.794		0.772		0.589	
Lead	ug/L	< 0.094	U	0.214	J	< 0.128	U	< 0.128	U
Lithium	ug/L	56.3	J	47.5		54.3		51.7	
Mercury	ug/L	< 0.0653	U	< 0.101	U	< 0.101	U	< 0.101	U
Molybdenum	ug/L	0.481	J	< 0.61	U	< 0.61	U	< 0.61	U
Selenium	ug/L	< 0.813	U	< 2.62	U	< 1.51	U	< 1.51	U
Thallium	ug/L	< 0.063	U	< 0.128	U	0.216	J	< 0.148	U
Radium 226 + Radium 228	pCi/L	0.733		0.895	J	1.04	J	< 0.575	U
<b>Anions</b>									
Chloride	mg/L	7.09		7.22		5.58		6.79	
Fluoride	mg/L	0.253		0.217		0.209		0.149	
Sulfate	mg/L	263		277		244		272	J
<b>General Chemistry</b>									
Total Dissolved Solids	mg/L	573		594		637		600	
<b>Field Parameters</b>									
Temperature, Water (C)	DEG_C	14.8		13.4		21.2		23.2	
Turbidity, field	NTU	0.65		1.07		1.21		0.58	
ORP	mV	-74.6		-78.3		-69		-100.1	
Specific Cond. (Field)	mS/cm	0.77		0.9		0.83		0.91	
Dissolved Oxygen	mg/L	0.52		0.59		0.51		0.52	
pH (field)	SU	7		6.79		6.75		7.01	

Notes:

Q - Data Qualifier

U\* - Result should be considered "not-detected" because it was detected in a rinsate blank or laboratory blank at similar level

J - Quantitation is approximate due to limitations identified during data validation

UJ - Analyte not detected, but the reporting limit may or may not be higher due to a bias identified during data validation

U - Analyte not detected

ug/L - micrograms per liter

mg/L - milligrams per liter

pCi/L - picoCurie per liter

DEG\_C - degrees Celsius

NTU - Nephelometric Turbidity Units

mV - millivolts

mS/cm - milliseimens per centimeter

SU - Standard Unit

**Table 1  
Assessment Monitoring  
Groundwater Sampling  
Results**

**CCR Annual Groundwater Monitoring and  
Corrective Action Report - TVA Paradise  
Fossil Plant**

Monitoring Well		PAF-110							
Sample Date		08-Jan-19		06-Mar-19		23-Jul-19		01-Oct-19	
Sample Round		1		1 - Retest		2		2 - Retest	
Well Designation		Downgradient		Downgradient		Downgradient		Downgradient	
Analyte	Units	Result	Q	Result	Q	Result	Q	Result	Q
<b>Total Metals</b>									
Antimony	ug/L	< 1.12	U	< 0.378	U	< 0.378	U	< 0.378	U
Arsenic	ug/L	< 1.69	U*	1.29		< 0.323	U	< 0.323	U
Barium	ug/L	29.7		< 27.9	U*	< 21.9	U*	22.1	
Beryllium	ug/L	< 0.057	U	< 0.155	U	< 0.182	U	< 0.671	U*
Boron	ug/L	751		715		926		756	
Cadmium	ug/L	< 0.125	U						
Calcium	ug/L	149000		137000		156000		147000	
Chromium	ug/L	< 2.02	U*	< 1.53	U	< 1.53	U	< 1.53	U
Cobalt	ug/L	1.57		1.24		0.092	J	0.285	J
Lead	ug/L	< 0.094	U	< 0.128	U	< 0.128	U	< 0.128	U
Lithium	ug/L	50.8		41.6	J	47.1		56.6	
Mercury	ug/L	< 0.0653	U	< 0.101	U	< 0.101	U	< 0.101	U
Molybdenum	ug/L	0.805	J	0.638	J	< 0.61	U	< 0.713	U*
Selenium	ug/L	< 0.813	U	< 2.62	U	< 1.51	U	< 1.51	U
Thallium	ug/L	< 0.063	U	< 0.128	U	< 0.148	U	< 0.148	U
Radium 226 + Radium 228	pCi/L	0.972		0.694	J	< 0.479	UJ	< 0.853	U
<b>Anions</b>									
Chloride	mg/L	10.9		9.17		8.93		10	
Fluoride	mg/L	0.183		0.0779	J	0.0869	J	0.0747	J
Sulfate	mg/L	373	J	368		384		405	
<b>General Chemistry</b>									
Total Dissolved Solids	mg/L	888		846		887		847	
<b>Field Parameters</b>									
Temperature, Water (C)	DEG_C	18.5		14		20.5		21.9	
Turbidity, field	NTU	0.67		1.2		1.65		0.57	
ORP	mV	126.5		-45.9		160.8		80.2	
Specific Cond. (Field)	mS/cm	1.15		1.23		1.03		1.14	
Dissolved Oxygen	mg/L	0.6		0.83		2.68		0.51	
pH (field)	SU	6.73		6.62		6.77		6.79	

Notes:

Q - Data Qualifier

U\* - Result should be considered "not-detected" because it was detected in a rinsate blank or laboratory blank at similar level

J - Quantitation is approximate due to limitations identified during data validation

UJ - Analyte not detected, but the reporting limit may or may not be higher due to a bias identified during data validation

U - Analyte not detected

ug/L - micrograms per liter

mg/L - milligrams per liter

pCi/L - picoCurie per liter

DEG\_C - degrees Celsius

NTU - Nephelometric Turbidity Units

mV - millivolts

mS/cm - milliseimens per centimeter

SU - Standard Unit

**Table 1**  
**Assessment Monitoring**  
**Groundwater Sampling**  
**Results**

Monitoring Well		PAF-112							
Sample Date		09-Jan-19		05-Mar-19		23-Jul-19		01-Oct-19	
Sample Round		1		1 - Retest		2		2 - Retest	
Well Designation		Downgradient		Downgradient		Downgradient		Downgradient	
Analyte	Units	Result	Q	Result	Q	Result	Q	Result	Q
<b>Total Metals</b>									
Antimony	ug/L	< 1.12	U	< 0.378	U	< 0.378	U	< 0.378	U
Arsenic	ug/L	16.6		18		18		17.4	
Barium	ug/L	211		221		189		208	
Beryllium	ug/L	< 0.057	UJ	< 0.155	U	< 0.182	U	< 1.33	U*
Boron	ug/L	334	J	461		312		291	
Cadmium	ug/L	< 0.125	U	< 0.125	U	< 0.125	U	< 0.125	U
Calcium	ug/L	52100		55100		49500		47900	
Chromium	ug/L	< 2.14	U*	< 1.53	U	< 1.53	U	< 1.53	U
Cobalt	ug/L	0.396	J	0.384	J	0.262	J	0.296	J
Lead	ug/L	< 0.094	U	< 0.128	U	< 0.128	U	< 0.128	U
Lithium	ug/L	2.71	J	< 3.14	U	< 3.39	U	3.46	J
Mercury	ug/L	< 0.0653	U	< 0.101	U	< 0.101	U	< 0.101	U
Molybdenum	ug/L	0.744	J	< 0.61	U	< 0.636	U*	< 1.55	U*
Selenium	ug/L	< 0.813	U	< 2.62	U	< 1.51	U	< 1.51	U
Thallium	ug/L	< 0.063	U	< 0.128	U	< 0.148	U	< 0.757	U*
Radium 226 + Radium 228	pCi/L	0.855	J	0.784	J	0.760	J	< 0.722	U
<b>Anions</b>									
Chloride	mg/L	9.93		9.91		6.94		9.26	
Fluoride	mg/L	0.2		0.179		0.168		0.114	
Sulfate	mg/L	100		99.7		72.9		84.2	
<b>General Chemistry</b>									
Total Dissolved Solids	mg/L	380		371		328		331	
<b>Field Parameters</b>									
Temperature, Water (C)	DEG_C	15.6		12.7		20.9		21.1	
Turbidity, field	NTU	0.6		1.1		2.42		1.2	
ORP	mV	-68.1		-57.4		-57.8		-59.9	
Specific Cond. (Field)	mS/cm	0.58		0.73		0.57		0.63	
Dissolved Oxygen	mg/L	0.42		1.36		0.55		0.57	
pH (field)	SU	6.28		6.15		6.06		6.31	

Notes:

Q - Data Qualifier

U\* - Result should be considered "not-detected" because it was detected in a rinsate blank or laboratory blank at similar level

J - Quantitation is approximate due to limitations identified during data validation

UJ - Analyte not detected, but the reporting limit may or may not be higher due to a bias identified during data validation

U - Analyte not detected

ug/L - micrograms per liter

mg/L - milligrams per liter

pCi/L - picoCurie per liter

DEG\_C - degrees Celsius

NTU - Nephelometric Turbidity Units

mV - millivolts

mS/cm - milliseimens per centimeter

SU - Standard Unit

**Table 1**  
**Assessment Monitoring**  
**Groundwater Sampling**  
**Results**

Monitoring Well		PAF-113							
Sample Date		08-Jan-19		05-Mar-19		23-Jul-19		01-Oct-19	
Sample Round		1		1 - Retest		2		2 - Retest	
Well Designation		Downgradient		Downgradient		Downgradient		Downgradient	
Analyte	Units	Result	Q	Result	Q	Result	Q	Result	Q
<b>Total Metals</b>									
Antimony	ug/L	< 1.12	U	< 0.378	U	< 0.378	U	< 0.378	U
Arsenic	ug/L	70.8		76.2		71.9		80.8	
Barium	ug/L	173		182		164		176	
Beryllium	ug/L	< 0.057	UJ	< 0.155	U	< 0.182	U	< 0.567	U*
Boron	ug/L	44.5	J	< 63.3	U*	43.1	J	< 38.6	U
Cadmium	ug/L	< 0.125	U	< 0.125	U	< 0.125	U	< 0.125	U
Calcium	ug/L	53800		53700		53100		49100	
Chromium	ug/L	< 2.33	U*	< 1.53	U	< 1.53	U	< 1.53	U
Cobalt	ug/L	0.601		0.306	J	0.228	J	0.151	J
Lead	ug/L	< 0.094	U	< 0.128	U	< 0.128	U	< 0.128	U
Lithium	ug/L	< 2.56	UJ	< 3.14	U	< 3.39	U	< 3.39	U
Mercury	ug/L	< 0.0653	U	< 0.101	U	< 0.101	U	< 0.101	U
Molybdenum	ug/L	3.64	J	3.39	J	3.49	J	4.71	J
Selenium	ug/L	< 0.813	U	< 2.62	U	< 1.51	U	< 1.51	U
Thallium	ug/L	< 0.063	U	< 0.128	U	< 0.148	U	< 0.148	U
Radium 226 + Radium 228	pCi/L	0.383	J	0.654	J	0.573	J	< 0.776	U
<b>Anions</b>									
Chloride	mg/L	20.5		21.1		16		19	
Fluoride	mg/L	0.425		0.326		0.325		0.276	
Sulfate	mg/L	1.59		1.44		1.04		< 1.28	U*
<b>General Chemistry</b>									
Total Dissolved Solids	mg/L	286		248		280		251	
<b>Field Parameters</b>									
Temperature, Water (C)	DEG_C	17.9		11.6		20.6		22.6	
Turbidity, field	NTU	4.73		4.17		7.59		3.4	
ORP	mV	23.4		-126.9		-155.8		-158.7	
Specific Cond. (Field)	mS/cm	0.64		0.8		0.58		0.62	
Dissolved Oxygen	mg/L	0.57		0.4		0.12		0.2	
pH (field)	SU	6.88		6.8		6.63		6.95	

Notes:

Q - Data Qualifier

U\* - Result should be considered "not-detected" because it was detected in a rinsate blank or laboratory blank at similar level

J - Quantitation is approximate due to limitations identified during data validation

UJ - Analyte not detected, but the reporting limit may or may not be higher due to a bias identified during data validation

U - Analyte not detected

ug/L - micrograms per liter

mg/L - milligrams per liter

pCi/L - picoCurie per liter

DEG\_C - degrees Celsius

NTU - Nephelometric Turbidity Units

mV - millivolts

mS/cm - milliseimens per centimeter

SU - Standard Unit

**Table 2  
Groundwater Sampling Summary**

**CCR Annual Groundwater Monitoring and Corrective  
Action Report - TVA Paradise Fossil Plant**

Well ID	Well Designation	Number of Samples Collected	January 8-9, 2019	March 4-6, 2019	July 23-24, 2019	October 1-2, 2019	Monitoring Program
			Sample Round 1	1 - Retest	2	2 - Retest	
95-47C	Downgradient	4	X	X	X	X	Assessment Monitoring - 257.95(a); 257.95(b); 257.95(d)(1) - Appendix III and Appendix IV Constituents
95-48A	Background	4	X	X	X	X	Assessment Monitoring - 257.95(a); 257.95(b); 257.95(d)(1) - Appendix III and Appendix IV Constituents
PAF-108	Upgradient	4	X	X	X	X	Assessment Monitoring - 257.95(a); 257.95(b); 257.95(d)(1) - Appendix III and Appendix IV Constituents
PAF-109	Upgradient	4	X	X	X	X	Assessment Monitoring - 257.95(a); 257.95(b); 257.95(d)(1) - Appendix III and Appendix IV Constituents
PAF-110	Downgradient	4	X	X	X	X	Assessment Monitoring - 257.95(a); 257.95(b); 257.95(d)(1) - Appendix III and Appendix IV Constituents
PAF-112	Downgradient	4	X	X	X	X	Assessment Monitoring - 257.95(a); 257.95(b); 257.95(d)(1) - Appendix III and Appendix IV Constituents
PAF-113	Downgradient	4	X	X	X	X	Assessment Monitoring - 257.95(a); 257.95(b); 257.95(d)(1) - Appendix III and Appendix IV Constituents

Notes:

Assessment Monitoring groundwater samples analyzed for Appendix III and Appendix IV constituents

Appendix III Constituents - boron, calcium, chloride, fluoride, pH, sulfate, total dissolved solids (TDS)

Appendix IV Constituents - antimony, arsenic, barium, beryllium, cadmium, chromium, cobalt, fluoride, lead, lithium, mercury, molybdenum, selenium, thallium, radium 226 and radium 228 combined

**Table 3  
Groundwater and Surface Water  
Elevation Summary**

**CCR Annual Groundwater  
Monitoring and Corrective Action  
Report - TVA Paradise Fossil Plant**

Groundwater Elevation Collection Date		08-Jan-19	04-Mar-19	22-Jul-19	30-Sep-19
Monitoring Well	Units				
95-47C	ft-MSL	381.73	391.33	374.49	374.07
95-48A	ft-MSL	445.20	444.08	444.23	443.77
PAF-108	ft-MSL	408.02	407.74	408.05	407.84
PAF-109	ft-MSL	410.71	410.88	410.97	410.62
PAF-110	ft-MSL	385.64	392.82	379.87	379.08
PAF-112	ft-MSL	392.27	397.43	387.42	385.63
PAF-113	ft-MSL	398.31	401.17	396.30	394.87
		Surface Water			
<b>Green River</b>	ft-MSL	378.72	390.20	365.92	365.23

Notes:

ft-MSL - Feet above mean sea level

**Table 4  
Hydraulic Conductivity Data  
Summary**

**CCR Annual Groundwater Monitoring and  
Corrective Action Report - TVA  
Paradise Fossil Plant**

<b>Well ID</b>	<b>Well Designation</b>	<b>Slug Test Hydraulic Conductivity (cm/sec)</b>
<b>95-47C</b>	Downgradient	1.04E-03
<b>95-48A</b>	Background	1.25E-03
<b>PAF-108</b>	Upgradient	4.40E-05
<b>PAF-109</b>	Upgradient	1.27E-04
<b>PAF-110</b>	Downgradient	5.51E-05
<b>PAF-112</b>	Downgradient	2.32E-05
<b>PAF-113</b>	Downgradient	5.01E-06
<b>Geometric Mean of Hydraulic Conductivity (cm/sec)</b>		<b>8.96E-05</b>

Notes:

cm/sec - centimeters per second

**Table 5  
Rate and Direction of Groundwater  
Flow Summary**

**CCR Annual Groundwater Monitoring and  
Corrective Action Report  
TVA - Paradise Fossil Plant Slag Ponds**

<b>Groundwater Elevation Collection Date</b>	<b>8-Jan-19</b>	<b>4-Mar-19</b>	<b>22-Jul-19</b>	<b>30-Sep-19</b>
<b>Sample Round</b>	<b>1</b>	<b>1 - Retest</b>	<b>2</b>	<b>2 - Retest</b>
Horizontal Gradient	0.0190	0.0137	0.0242	0.0255
Hydraulic Conductivity (cm/sec)	8.96E-05	8.96E-05	8.96E-05	8.96E-05
Effective Porosity	30%	30%	30%	30%
Flow Direction (cardinal)	East	East	East	East
Linear Velocity (ft/yr)	6	4	7	8

Notes:

cm/sec - centimeters per second

ft/yr - feet per year

**TABLE 6: Statistically Significant Levels (SSLs) Above GWPSs**

Appendix IV Parameter*	GWPS (a)	Updated GWPS (b)	Downgradient wells with analytical results above GWPS (c)	Updated LCBs (d)	SSL LCB > GWPS (e)
Antimony (mg/l)	0.006	0.006	None	NA	NA
Arsenic (mg/l)	0.0134	0.0127	PAF-112	0.002	NO
			PAF-113	0.075	YES
Barium (mg/l)	2	2	None	NA	NA
Beryllium (mg/l)	0.004	0.004	None	NA	NA
Cadmium (mg/l)	0.005	0.005	None	NA	NA
Chromium (mg/l)	0.1	0.1	None	NA	NA
Cobalt (mg/l)	0.0897	0.0995	None	NA	NA
Fluoride (mg/l)	4	4	None	NA	NA
Lead (mg/l)	0.015	0.015	None	NA	NA
Lithium (mg/l)	0.17	0.17	95-47C	0.116	NO
Mercury (mg/l)	0.002	0.002	None	NA	NA
Molybdenum (mg/l)	0.1	0.1	None	NA	NA
Radium-226+228 (pCi/l)	5	5	None	NA	NA
Selenium (mg/l)	0.05	0.05	None	NA	NA
Thallium (mg/l)	0.002	0.002	None	NA	NA

Notes:

NA – Not applicable

\* - Total Metals concentrations presented in Table 1 are reported in micrograms per liter (µg/L)

(a) GWPSs documented in notice dated 10/15/2018 [reported in milligrams per liter (mg/L)]

(b) GWPSs updated as of 10/4/2019 with 3 additional sample results collected on January 7-11, 2019, March 4-7, 2019 and July 23-25, 2019 [reported in mg/L]

(c) Downgradient wells with analytical results above GWPS November 2016 through July 23-25, 2019 (per 40 CFR 257.95(b) and (d))

(d) Most recent value of 99% lower confidence band (LCB) on the mean of Appendix IV groundwater sampling events between November 2016 and July 23-25, 2019. Upper confidence band (UCB) not shown as it is greater than LCB [reported in mg/L]

(e) SSL: "statistically significant level over GWPS" occurs when the updated LCB value at the last sampling event exceeds the updated GWPS

**APPENDIX A  
STATISTICAL ANALYSIS REPORT**

**STATISTICAL ANALYSIS REPORT  
PARADISE FOSSIL PLANT**

**2019**

## Contents

1	Introduction .....	2
2	Statistical Analysis .....	4
2.1	Developing Groundwater Protection Standards (GWPS) .....	4
2.2	Computing Trend Lines and Confidence Interval Bands .....	8
2.2.1	Outliers .....	9
2.3	Comparing Confidence Interval Bands Against GWPS .....	10
3	Summary of Statistical Analysis .....	11
4	References .....	15

## Tables

Table 1.	CCR Rule Monitoring Well Networks .....	2
Table 2.	CCR Rule Monitored Constituents .....	3
Table 3A.	PAF, Gypsum Stack, Groundwater Protection Standards (GWPS) .....	5
Table 3B.	PAF, Peabody, Groundwater Protection Standards (GWPS) .....	5
Table 3C.	PAF, Slag Pond, Groundwater Protection Standards (GWPS) .....	6
Table 4A.	Descriptive Summary Statistics of Background Data, Gypsum Stack .....	7
Table 4B.	Descriptive Summary Statistics of Background Data, Peabody .....	8
Table 4C.	Descriptive Summary Statistics of Background Data, Slag Pond .....	8

# 1 Introduction

This report summarizes the statistical analysis performed on groundwater quality constituents monitored during the Coal Combustion Residuals (CCR) Rule’s 2019 Annual Groundwater Monitoring (GWM) Program for the Tennessee Valley Authority (TVA) Paradise Fossil Plant (PAF). The 2019 Annual GWM Program is the third year of the program. Statistically significant increases (SSIs) were identified for one or more parameters based on the 2017 annual groundwater sampling results; therefore, the CCR Units transitioned to the Assessment Monitoring phase of the monitoring program.

Baseline datasets collected during the first year of monitoring were combined with data collected in 2018 and 2019 and were used to establish statistically-derived Groundwater Protection Standards (GWPS) for each Unit located at PAF. Consistent with methods presented in USEPA’s Unified Guidance document on the statistical analysis of groundwater monitoring data (2009), confidence-interval (CI) bands were compared against relevant GWPS. A statistically significant level (SSL) is found if and only if the lower limit of the CI band exceeds the GWPS for the most recent Assessment Monitoring sampling event.

At the PAF plant’s CCR Units, the sampling results used to identify potential GWPS exceedances were obtained during a minimum of three distinct monitoring events that were performed between January and July of 2019 by Terracon, with laboratory analysis performed by Test America Laboratories (located at Pittsburg, PA, and St Louis, MO), and Quality Assurance Controls by Environmental Standards, Inc., all under direct contracts to TVA.

The current CCR Rule groundwater monitoring networks — one for the Gypsum Stack area, one for the Peabody area, and one for the Slag Pond area — as Certified by a Professional Engineer at the firm of AECOM or other, are presented in **Table 1**.

**Table 1. CCR Rule Monitoring Well Networks**

Site	Background		Downgradient	
Gypsum Stack	95-48A PAF-101 PAF-104		94-35A PAF-114 PAF-103	PAF-115 PAF-116
Peabody Ash Pond	95-48A 10-5	PAF-105 PAF-106	PAF-119 10-6 PAF-118	PAF-117 PAF-107 10-4
Slag Ponds Area	95-48A PAF-108	PAF-109	PAF-110 95-47C	PAF-113 PAF-112

The ‘R’ Statistical Analysis package ([www.r-project.org](http://www.r-project.org)) in conjunction with R-Studio ([www.rstudio.com](http://www.rstudio.com)) (both popular public domain software products) and other analytical tools were used in the production of the statistical values and graphs. ProUCL data dumps from

TVA's EQIS Professional and Enterprise Database were used to populate the R-based statistical analyses.

Groundwater samples collected as part of the CCR Rule monitoring program were analyzed for constituents listed in Appendix IV of the CCR Rule. Only non-filtered sample results were utilized for the statistical analysis of Appendix IV constituents. As high turbidity measurements during the purging of wells (e.g., values above 5 NTUs) have the propensity to increase the concentrations of Appendix IV constituents, filtered samples were also collected to better understand and/or dispel the potential source(s) of falsely-named GWPS exceedances. A summary of constituents included in the data analysis is provided in the second column of **Table 2**.

**Table 2. CCR Rule Monitored Constituents**

Appendix III Constituents (Detection Monitoring)	Appendix IV Constituents (Assessment Monitoring)
Boron	Antimony
Calcium	Arsenic
Chloride	Barium
Fluoride	Beryllium
pH (field)	Cadmium
Sulfate	Chromium
Total Dissolved Solids (TDS)	Cobalt
	Fluoride
	Lead
	Lithium
	Mercury
	Molybdenum
	Radium 226 + 228
	Selenium
	Thallium

## 2 Statistical Analysis

The Assessment Monitoring analysis includes the following steps:

- 1) Developing GWPS for each Appendix IV constituent. The GWPS is the published MCL/water quality limit or the background concentration (95% UTL with 95% coverage), whichever is larger;
- 2) Computing trends and associated CI bands for each downgradient well location and Appendix IV constituent (i.e., each well-constituent pair); and
- 3) Comparing each CI band against its respective GWPS to assess whether an exceedance occurred.

### 2.1 Developing Groundwater Protection Standards (GWPS)

According to the promulgated CCR Rule (80 Federal Register 21302, 21405, April 17, 2015):

“For each appendix IV constituent that is detected, a groundwater protection standard must be set. The groundwater protection standards must be the MCL or the background concentration level for the detected constituent, whichever is higher. If there is no MCL promulgated for a detected constituent, then the groundwater protection standard must be set at background.”

On July 17, 2018, EPA unofficially promulgated alternate regulatory limits (i.e., potential GWPS) for four of the Appendix IV chemical Constituents of Interest (COIs) for which the agency has not assigned MCLs to date. In the absence of MCLs or site-specific GWPS, those may be used in place of background levels under 257.95(h)(2). Specifically, those alternate COIs include threshold values at the following health-based levels:

1. Cobalt - 6 µg/L
2. Lithium - 40 µg/L
3. Molybdenum – 100 µg/L
4. Lead - 15 µg/L.

An Upper Tolerance Limit (UTL) with 95% confidence and 95% coverage was calculated using pooled site-specific background data for each Appendix IV parameter. Then these UTLs were compared against the promulgated regulatory limits to determine the site-specific GWPS.

To handle any non-detects in these calculations, non-detect values were treated as statistically ‘left-censored,’ with the censoring limit equal to the reporting limit (RL). Then the Kaplan-Meier adjustment method (USEPA, 2009) was employed to derive estimated summary statistics that account for the presence of non-detects.

For PAF, **Table 3, included below**, lists the calculated UTLs and final GWPS established for CCR Units.

**Table 3A. PAF, Gypsum Stack, Groundwater Protection Standards (GWPS)**

COI	N	ND.PCT	MODEL	COV	CONF	UTL	UNITS	MCL	GWPS
Antimony	57	94.7	NP	0.95	0.946	0.0024	mg/L	0.006	0.006
Arsenic	57	0	NP	0.95	0.946	0.0154	mg/L	0.01	0.0154
Barium	57	14	NP	0.95	0.946	0.2510	mg/L	2	2
Beryllium	57	66.7	Square	0.95	0.950	0.0011	mg/L	0.004	0.004
Cadmium	57	100	NP	0.95	0.946	0.0010	mg/L	0.005	0.005
Chromium	57	91.2	Fourth Root	0.95	0.950	0.0034	mg/L	0.1	0.1
Cobalt*	57	3.5	NP	0.95	0.946	0.0995	mg/L	0.006	0.0995
Fluoride	60	5	Square Root	0.95	0.950	0.6192	mg/L	4	4
Lead	57	87.7	Tenth Root	0.95	0.950	0.0014	mg/L	0.015	0.015
Lithium*	57	0	NP	0.95	0.946	0.1700	mg/L	0.04	0.17
Mercury	57	100	NP	0.95	0.946	0.0002	mg/L	0.002	0.002
Molybdenum*	57	35.1	NP	0.95	0.946	0.0092	mg/L	0.1	0.1
Rad226+228	57	0	Cube Root	0.95	0.950	3.8391	pCi/L	5	5
Selenium	57	91.2	Square	0.95	0.950	0.0020	mg/L	0.05	0.05
Thallium	57	94.7	NP	0.95	0.946	0.0010	mg/L	0.002	0.002

\* No potential Health Effects provided for these Constituents of Interests (COI)

**Table 4B. PAF, Peabody, Groundwater Protection Standards (GWPS)**

COI	N	ND.PCT	MODEL	COV	CONF	UTL	UNITS	MCL	GWPS
Antimony	76	98.7	NP	0.95	0.980	0.0049	mg/L	0.006	0.006
Arsenic	76	14.5	NP	0.95	0.980	0.0154	mg/L	0.01	0.0154
Barium	76	18.4	Square	0.95	0.950	0.0157	mg/L	2	2
Beryllium	76	75	Square	0.95	0.950	0.0011	mg/L	0.004	0.004
Cadmium	76	97.4	NP	0.95	0.980	0.0014	mg/L	0.005	0.005
Chromium	76	97.4	NP	0.95	0.980	0.0029	mg/L	0.1	0.1
Cobalt*	76	3.9	NP	0.95	0.980	0.0995	mg/L	0.006	0.0995
Fluoride	80	7.5	Log	0.95	0.950	0.5602	mg/L	4	4
Lead	76	86.8	NP	0.95	0.980	0.0031	mg/L	0.015	0.015
Lithium*	76	0	NP	0.95	0.980	0.1700	mg/L	0.04	0.17
Mercury	76	100	NP	0.95	0.980	0.0002	mg/L	0.002	0.002
Molybdenum*	76	35.5	NP	0.95	0.980	0.0050	mg/L	0.1	0.1
Rad226+228	76	0	Tenth Root	0.95	0.950	3.6056	pCi/L	5	5
Selenium	76	94.7	Log	0.95	0.950	0.0021	mg/L	0.05	0.05
Thallium	76	88.2	NP	0.95	0.980	0.0010	mg/L	0.002	0.002

**Table 5C. PAF, Slag Pond, Groundwater Protection Standards (GWPS)**

COI	N	ND.PCT	MODEL	COV	CONF	UTL	UNITS	MCL	GWPS
Antimony	57	98.2	NP	0.95	0.946	0.0026	mg/L	0.006	0.006
Arsenic	57	21.1	Log	0.95	0.950	0.0127	mg/L	0.01	0.0127
Barium	57	12.3	NP	0.95	0.946	0.0627	mg/L	2	2
Beryllium	57	66.7	NORMAL	0.95	0.950	0.0011	mg/L	0.004	0.004
Cadmium	57	100	NP	0.95	0.946	0.0010	mg/L	0.005	0.005
Chromium	57	98.2	NP	0.95	0.946	0.0023	mg/L	0.1	0.1
Cobalt*	57	1.8	NP	0.95	0.946	0.0995	mg/L	0.006	0.0995
Fluoride	59	5.1	Log	0.95	0.950	0.6289	mg/L	4	4
Lead	57	86	NP	0.95	0.946	0.0010	mg/L	0.015	0.015
Lithium*	57	0	NP	0.95	0.946	0.1700	mg/L	0.04	0.17
Mercury	57	100	NP	0.95	0.946	0.0002	mg/L	0.002	0.002
Molybdenum*	57	40.4	Log	0.95	0.950	0.0021	mg/L	0.1	0.1
Rad226+228	57	0	Cube Root	0.95	0.950	3.6827	pCi/L	5	5
Selenium	57	93	Log	0.95	0.950	0.0021	mg/L	0.05	0.05
Thallium	57	91.2	Square	0.95	0.950	0.0003	mg/L	0.002	0.002

To compute each UTL, the following steps were taken:

- 1) All baseline data - those from designated up-gradient or background wells collected from the Program's first sampling event through August of 2018 were grouped and checked for possible outliers.

At PAF, no likely outliers among the background data were flagged at any of the CCR units.

- 2) The grouped baseline data were also analyzed to determine whether they could be fit to a known statistical model. If so, a parametric UTL was computed; if not, a nonparametric UTL was constructed.

To fit potential statistical models, a series of normalizing mathematical transformations was applied to each baseline dataset. These transformations are known as power transformations, since they raise each observation to a mathematical power. The goal is to find, if possible, a transformation that normalizes the data on the transformed scale.

Datasets which could not be sufficiently normalized were analyzed using nonparametric methods. Nonparametric UTLs do not assume a known statistical model and require larger sample sizes to achieve the target confidence level of 95%.

- 3) The final statistical model for each COI was used to compute an UTL with 95% coverage and 95% confidence.

When a parametric model is appropriate, on the normalized scale, a UTL is computed using the standard normal theory equation:

$$UTL = \bar{x} + \kappa s$$

where  $\bar{x}$  and  $s$  represent the mean and standard deviation of the (transformed) observations, and  $\kappa$  is a multiplier which depends on the number of baseline measurements, as well as the desired coverage and confidence levels. If the data have been transformed, the final UTL is derived by back-transforming the scaled UTL.

For nonparametric models, the normal theory equation does not apply. Instead, the UTL is selected as one of the largest of the sample values, typically the maximum. Because there is no multiplier as in the parametric case, the confidence level associated with a nonparametric UTL is computed 'after the fact,' based on the sample size and desired coverage level: the smaller the sample size, the lower the confidence; the bigger the sample size, the higher the confidence level.

**Table 6A. Descriptive Summary Statistics of Background Data, Gypsum Stack**

Constituent	Unit	N	No. of NDs	Minimum	Maximum	Mean	Median
Antimony	mg/L	57	54	0.0007	0.0024	0.0012	0.0019
Arsenic	mg/L	57	0	0.0032	0.0154	0.0067	0.0066
Barium	mg/L	57	8	0.0046	0.2510	0.0128	0.0129
Beryllium	mg/L	57	38	0.0002	0.0012	0.0007	0.0007
Cadmium	mg/L	57	57	0.0010	0.0010	0.0005	0.0010
Chromium	mg/L	57	52	0.0006	0.0045	0.0012	0.0016
Cobalt	mg/L	57	2	0.0003	0.0995	0.0288	0.0036
Fluoride	mg/L	60	3	0.1410	0.6530	0.3405	0.3480
Lead	mg/L	57	50	0.0001	0.0023	0.0003	0.0003
Lithium	mg/L	57	0	0.0457	0.1700	0.0870	0.0591
Mercury	mg/L	57	57	0.0002	0.0002	0.0001	0.0002
Molybdenum	mg/L	57	20	0.0009	0.0092	0.0029	0.0015
Rad226+228	pCi/L	57	0	0.1210	3.3700	1.2544	1.0200
Selenium	mg/L	57	52	0.0009	0.0050	0.0014	0.0014
Thallium	mg/L	57	54	0.0001	0.0010	0.0001	0.0002

Notes:

1. ND = not detected above the laboratory reporting limit.
2. All computations involving non-detects handled using the Kaplan-Meier adjustment. In the case of 100% NDs, mean is computed by substituting half the reporting limit for each ND.

**Table 7B. Descriptive Summary Statistics of Background Data, Peabody**

Constituent	Unit	N	No. of NDs	Minimum	Maximum	Mean	Median
Antimony	mg/L	76	75	0.0004	0.0049	0.0004	0.0027
Arsenic	mg/L	76	11	0.0006	0.0154	0.0055	0.0060
Barium	mg/L	76	14	0.0046	0.2800	0.0103	0.0107
Beryllium	mg/L	76	57	0.0002	0.0012	0.0007	0.0007
Cadmium	mg/L	76	74	0.0001	0.0014	0.0002	0.0006
Chromium	mg/L	76	74	0.0009	0.0029	0.0009	0.0020
Cobalt	mg/L	76	3	0.0004	0.0995	0.0239	0.0032
Fluoride	mg/L	80	6	0.1230	0.6530	0.3102	0.2900
Lead	mg/L	76	66	0.0001	0.0031	0.0002	0.0001
Lithium	mg/L	76	0	0.0355	0.1700	0.0794	0.0631
Mercury	mg/L	76	76	0.0002	0.0002	0.0001	0.0002
Molybdenum	mg/L	76	27	0.0005	0.0050	0.0023	0.0016
Rad226+228	pCi/L	76	0	0.1330	3.3700	1.1478	0.8760
Selenium	mg/L	76	72	0.0013	0.0050	0.0015	0.0014
Thallium	mg/L	76	67	0.0001	0.0010	0.0001	0.0001

**Table 8C. Descriptive Summary Statistics of Background Data, Slag Pond**

Constituent	Unit	N	No. of NDs	Minimum	Maximum	Mean	Median
Antimony	mg/L	57	56	0.0008	0.0026	0.0008	0.0018
Arsenic	mg/L	57	12	0.0006	0.0154	0.0032	0.0022
Barium	mg/L	57	7	0.0046	0.0627	0.0282	0.0363
Beryllium	mg/L	57	38	0.0003	0.0012	0.0007	0.0007
Cadmium	mg/L	57	57	0.0010	0.0010	0.0005	0.0010
Chromium	mg/L	57	56	0.0009	0.0023	0.0009	0.0020
Cobalt	mg/L	57	1	0.0002	0.0995	0.0303	0.0072
Fluoride	mg/L	60	3	0.0891	1.1000	0.2960	0.2390
Lead	mg/L	57	49	0.0001	0.0010	0.0003	0.0001
Lithium	mg/L	57	0	0.0251	0.1700	0.0800	0.0500
Mercury	mg/L	57	57	0.0002	0.0002	0.0001	0.0002
Molybdenum	mg/L	57	23	0.0005	0.0050	0.0011	0.0010
Rad226+228	pCi/L	57	0	0.3950	3.3700	1.5620	1.4800
Selenium	mg/L	57	53	0.0013	0.0050	0.0015	0.0014
Thallium	mg/L	57	52	0.0001	0.0010	0.0001	0.0002

## 2.2 Computing Trend Lines and Confidence Interval Bands

The USEPA's Unified Guidance recommends comparing some type of CI against a GWPS in order to assess whether or not the limit has been exceeded with statistical significance. If the entire interval exceeds the GWPS, an SSL is identified. If none of the interval, or only part, exceeds the GWPS, no SSL is recorded.

Since groundwater data are collected over time, variation in the measurements may be due to a trend. To account for this possibility, USEPA also recommends a variation on the confidence interval method known as a confidence interval band around a trend line. In this case, a (linear) trend line is first fit to the data, then a confidence band is constructed around the trend line. The confidence interval band can be compared against a GWPS in much the same fashion as a confidence interval, only now a comparison can be made at different points in time by comparing the 'cross-section' of the band for a given sampling date. If the interval represented by the confidence band cross-section fully exceeds the GWPS, an SSL is identified for that sampling event.

At PAF, CI bands were constructed using equations [21.24] and [21.25] of Section 21.3 in the Unified Guidance for each well-constituent pair using all data collected through September of 2018. Cross-sections of each band were then compared to the GWPS for the most recent Assessment Monitoring event in each case for the purpose of identifying any SSLs.

For well-constituent pairs with no non-detects, linear regression and the formula above were used to construct each confidence band with 98% overall confidence, corresponding to a lower confidence limit with 99% confidence. When non-detects are present, the same formulas apply but an adjustment must be made for the censored measurements. The strategy adopted for TVA's CCR sites involves the following steps:

- 1) Each non-detect is assumed to follow a triangle distribution centered at half the (sample-specific) reporting limit, and with limits extending from zero to the reporting limit. Then an imputation for each non-detect is randomly drawn from this distribution;
- 2) The combined set of detected values and imputed non-detects are used to estimate a linear regression trend line and associated confidence band with 98% statistical confidence;
- 3) Steps (1) and (2) are repeated 500 times, each time with a different set of random imputations, leading to 500 potentially different trend lines and confidence bands;
- 4) The 500 sets of trends lines and bands are averaged point-wise (i.e., at each time along a sequence of dates spanning the time range of the data) to compute the final trend and confidence band estimates.

By repeating this sequence of steps a large number of times (500), the uncertainty associated with the non-detects can be reasonably captured within the final CI band estimate.

### **2.2.1 Outliers**

Prior to constructing any of the CI bands, the data at each well-constituent pair were examined for possible outliers. Any possible outliers were then tested using Rosner's outlier test. For the PAF CCR units, three observations were confirmed as outliers in the Gypsum Stack network, four outliers were identified in the Peabody area network, and three outliers were confirmed in the Slag Pond network. All of these observations were excluded from subsequent statistical calculations. Table 5 lists the outliers confirmed using Rosner's test.

**Table 5. Confirmed Statistical Outliers at PAF CCR Sites**

Site	Constituent	Units	Outlier Value	Well Location	Sampling Date
Gypsum Stack	Barium	mg/L	0.0361	PAF-104	05-02-2017
	Barium	mg/L	0.515	PAF-115	03-07-2019
	Barium	mg/L	1.42	PAF-116	03-07-2019
Peabody	Arsenic	mg/L	0.0506	10-4	06-29-2017
	Barium	mg/L	0.184	PAF-118	01-19-2017
	Barium	mg/L	0.384	PAF-107	11-30-2016
Slag Pond	Fluoride	mg/L	1.51	10-4	03-09-2017
	Fluoride	mg/L	1.1	PAF-109	03-09-2017
	Fluoride	mg/L	0.48	PAF-110	08-21-2018
	Fluoride	mg/L	1.66	PAF-113	02-10-2017

### 2.3 Comparing Confidence Interval Bands Against GWPS

To assess whether any SSLs occurred during the 2018 Assessment Monitoring at PAF, the CI bands were compared against the constituent-specific GWPS. An SSL was identified if and only if the CI band fully exceeded the GWPS at the *most recent* sampling event.

### 3 Summary of Statistical Analysis

To facilitate an ‘at-a-glance’ summary of the statistical comparison results, **Table 6** is a set of ‘traffic light’ matrices, showing for each CCR network a compact representation of each well location matched against each constituent in Appendix IV. This summary is useful in planning for mitigation actions. Green cells indicate that no SSL was observed in 2018. Red cells indicate that an SSL was flagged during the most recent sampling events. Yellow cells are warnings which indicate that a well-constituent pair should be closely watched. These cases have increasing trends and a CI band whose lower limit is at least 65% of the GWPS. Often, the CI band cross-section straddles the GWPS in yellow cells.

At the PAF Gypsum Stack CCR Unit (Table 6A), no SSLs were recorded during Assessment Monitoring. Warning flags (yellow) were raised for cobalt and lithium at well 93-48A, for beryllium at well PAF-114, and for lithium at PAF-116. In summary, a total of zero SSLs and four warnings were identified across the network wells that are located near the PAF plant’s Gypsum Stack CCR Unit during the Assessment Monitoring.

At the PAF Peabody Ash Pond CCR Unit (Table 6B), one arsenic-related SSL was recorded at well PAF-119 during Assessment Monitoring. Warning flags (yellow) were raised for cobalt and lithium at well 95-48A. In summary, a total of one SSL and two warnings were identified across the network wells that are located near the PAF plant’s Peabody Ash Pond CCR Unit during the Assessment Monitoring.

At the PAF Slag Ponds CCR Unit (Table 6C), one arsenic-related SSL was recorded at well PAF-113 during Assessment Monitoring. Warning flags (yellow) were raised for cobalt and lithium at well 95-48A, and for arsenic at PAF-112. In summary, a total of one SSL and three warnings were identified across the network wells that are located near the PAF plant’s Slag Ponds CCR Unit during the Assessment Monitoring.

Table 6A. PAF Gypsum Stack - Traffic Light Matrix Based on Comparative Analysis of Statistical Analysis Results versus Groundwater Protection Standards (GWPS)

ITEM No.	Constituent of Interest	TRAFFIC LIGHT MATRIX							
		GROUNDWATER QUALITY MONITORING WELL LOCATIONS							
		95-48A	PAF-101	PAF-104	94-35A	PAF-114	PAF-103	PAF-115	PAF-116
1.	Antimony	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN
2.	Arsenic	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN
3.	Barium	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN
4.	Beryllium	GREEN	GREEN	GREEN	GREEN	YELLOW	GREEN	GREEN	GREEN
5.	Cadmium	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN
6.	Chromium	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN
7.	Cobalt	YELLOW	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN
8.	Fluoride	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN
9.	Lead	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN
10.	Lithium	YELLOW	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	YELLOW
11.	Mercury	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN
12.	Molybdenum	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN
13.	Rad226+228	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN
14.	Selenium	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN
15.	Thallium	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN

COLOR-CODING KEY:	
	Monitored data for the specific COI are deemed to fall below GWPS
	Monitored data are deemed to fall below GWPS, but an internal warning is issued to TVA staff that CI band lower limit is at least 65% of the GWPS.
	Monitored data for the specific COI are deemed to exceed GWPS

Table 6B. PAF Peabody Ash Pond - Traffic Light Matrix Based on Comparative Analysis of Statistical Analysis Results versus Groundwater Protection Standards (GWPS)

ITEM No.	Constituent of Interest	TRAFFIC LIGHT MATRIX									
		GROUNDWATER QUALITY MONITORING WELL LOCATIONS									
		95-48A	10-5	PAF-105	PAF-106	PAF-119	10-6	PAF-118	PAF-117	PAF-107	10-4
16.	Antimony	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN
17.	Arsenic	GREEN	GREEN	GREEN	GREEN	RED	GREEN	GREEN	GREEN	GREEN	GREEN
18.	Barium	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN
19.	Beryllium	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN
20.	Cadmium	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN
21.	Chromium	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN
22.	Cobalt	YELLOW	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN
23.	Fluoride	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN
24.	Lead	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN
25.	Lithium	YELLOW	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN
26.	Mercury	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN
27.	Molybdenum	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN
28.	Rad226+228	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN
29.	Selenium	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN
30.	Thallium	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN

COLOR-CODING KEY:	
	Monitored data for the specific COI are deemed to fall below GWPS
	Monitored data are deemed to fall below GWPS, but an internal warning is issued to TVA staff that CI band lower limit is at least 65% of the GWPS.
	Monitored data for the specific COI are deemed to exceed GWPS

Table 6C. PAF Slag Pond - Traffic Light Matrix Based on Comparative Analysis of Statistical Analysis Results versus Groundwater Protection Standards (GWPS)

ITEM No.	Constituent of Interest	TRAFFIC LIGHT MATRIX						
		GROUNDWATER QUALITY MONITORING WELL LOCATIONS						
		95-48A	PAF-108	PAF-109	PAF-110	95-47C	PAF-113	PAF-112
31.	Antimony	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN
32.	Arsenic	GREEN	GREEN	GREEN	GREEN	GREEN	RED	YELLOW
33.	Barium	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN
34.	Beryllium	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN
35.	Cadmium	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN
36.	Chromium	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN
37.	Cobalt	YELLOW	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN
38.	Fluoride	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN
39.	Lead	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN
40.	Lithium	YELLOW	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN
41.	Mercury	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN
42.	Molybdenum	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN
43.	Rad226+228	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN
44.	Selenium	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN
45.	Thallium	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN	GREEN

COLOR-CODING KEY:	
	Monitored data for the specific COI are deemed to fall below GWPS
	Monitored data are deemed to fall below GWPS, but an internal warning is issued to TVA staff that CI band lower limit is at least 65% of the GWPS.
	Monitored data for the specific COI are deemed to exceed GWPS

## 4 References

1) US Environmental Protection Agency (2009) *Statistical Analysis of Groundwater Monitoring Data at RCRA Facilities Unified Guidance* - Office of Resource Conservation and Recovery EPA 530/R-09-007

2) US Environmental Protection Agency (2007) *Framework for Metals Risk Assessment* EPA 120/R-07/001 Office of the Science Advisor Risk Assessment Forum, Washington, DC 20460